

AQUAHEAT™ NXT VEHICLE ENSUITE




OWNERS MANUAL

Model No. 10001866

CONTENTS

AQUAHEAT NXT VEHICLE ENSUITE - 10001866

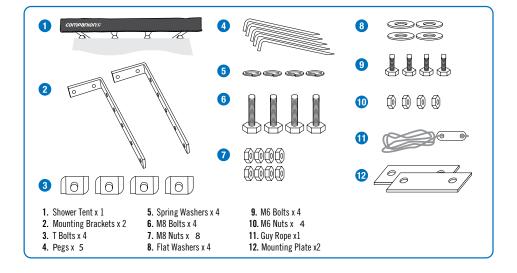

GENERAL INFO AND SAFETY INSTRUCTIONS



WARNING

INCORRECT INSTALLATION OR USE OF YOUR SHOWER TENT COULD RESULT IN SERIOUS INJURY OR DEATH.
FOLLOW THE INSTALLATION INSTRUCTIONS TO ENSURE THE SHOWER TENT IS INSTALLED CORRECTLY. FOLLOW
THE SET UP AND PACK DOWN INSTRUCTIONS CAREFULLY. IT IS RECOMMENDED THAT YOU CONTACT YOUR
VEHICLE AND/OR ACCESSORY MANUFACTURER FOR SPECIFIED LOADING AND CAPACITY OF YOUR VEHICLE'S
ROOF CAPACITY AND THE RACK CAPACITY. UNFORTUNATELY, NOT ALL VEHICLES AND ROOF RACKS CAN SAFELY
ACCOMMODATE ALL MODELS.

LOCATE MOUNTING LOCATIONS ON ROOF RACK

Companion® recommends this shower tent to be installed with 2-3 people. It is also recommended to use an experienced aftermarket 4X4 accessories fitter to mount the shower tent to your rack.

The maximum distance recommended from the mounting bracket to the end of the shower tent is 30cm. Ensure the brackets are spaced evenly on the shower tent.

MOUNTING BRACKETS TO ROOF RACK


Using the supplied M8 bolts/T bolts, nuts and spring washers - mount the brackets to the roof rack system. These brackets have been carefully designed to fit most common roof rack configurations. However, the increasing amount of roof rack designs available in the market makes it difficult to supply a bracket to fit all racks. The examples below show the brackets being mounted to different rack options. It is recommended to discuss specific mounting options and load capacities with a roof rack specialist. Ensure you attach the brackets at the same distance out from the car so the shower tent will mount straight. Failure to do so may result in the backboard bending which isn't covered under warranty. It is recommended to use a straight edge or measuring tape to check this before you finish tightening the bolts and nuts.

*DISCLAIMER: IMAGES ARE FOR ILLUSTRATIVE PURPOSES ONLY














2

ATTACH SHOWER TENT TO BRACKETS

Companion® recommends this shower tent to be installed with 2-3 people. It is also recommended to use an experienced aftermarket 4X4 accessories fitter to mount the shower tent to your rack. All mounting hardware on both the hower tent and roof rack should be checked regularly to ensure they are always mounted securely.

- 1. With the shower tent placed on a clean surface, insert the supplied M6 bolts into the aluminium backing plate at the correct locations.
- 2. Then with 2-3 people, lift the shower tent up and line the bolts up to the brackets and push through. Using the supplied M6 nuts, tighten the shower tent firmly onto the brackets.

SET UP

For windy and bad weather conditions, we recommend to not set the shower tent up to avoid damage **Companion®** accepts no liability for damages caused when this isn't followed.

- 1. Unzip the transit cover and fold it over the back. Release the two outer velcro straps and unroll the material towards the ground.
- 2. Release the two inner velcro straps so the rafters can be folded out. Fold the rafters out at the top and make sure the bottom section is set up correctly.
- 3. Peg down the base to secure the shower tent to the ground.
- 4. Attach roof cover to end of rafters

PACK UP

It is recommended to have 1 person to pack down the shower tent in normal conditions. In windy conditions, we recommend to have 2-3 people packing up to avoid damage to the shower tent. **Companion®** accepts no liability for damages caused when this isn't followed.

- 1. Remove all pegs, ropes, towels and other accessories out of the shower tent then roll back roof cover.
- 2. Press the release part of the hinge mechanism on the lower side then fold rafter inwards. Repeat on the other higher side.



PROLONGED TRAVELLING ON UNEVEN, Rough or Corrugated Terrain Will Require More Frequent Inspections

NOTE: Companion® takes no responsibility for the fitment of the shower tent to any vehicle or roof rack.

Figure1



Figure2



Figure3



Figure4



Figure5



TIP: IN RAINY CONDITIONS, IT IS RECOMMENDED TO ATTACH THE INCLUDED GUY ROPE ONTO THE GUY ROPE POINT ON THE ROOF TO CREATE A VALLEY FOR THE WATER RUN OUT OF.

TIP: THE CARRY BAG IS DESIGNED TO SIT TIGHT AROUND THE SHOWER TENT. THIS WILL ENSURE THE SHOWER TENT IS FIRMLY SECURED AND WILL LOWER THE CHANCE OF RUBBING WHEN IN TRANSIT.

3. Once the material and bottom skirting rods are flat, roll up the shower tent and secure in with the velcro straps. Then fold the transit cover over the top and zip up (refer to figure 1).

CLEANING

Clean with cold water and a soft bristle brush. Do not use soaps or detergents. Do not expose to petrol, diesel, oils or chemicals of any nature. Failure to follow these instructions may impact the performance of your shower tent and cause damage.

STORAGE

If you have to pack your shower tent up wet - it is essential that the shower tent is unpacked and allowed to dry fully as soon as possible. Failure to do so will result in damage to the shower tent fabric, waterproofing and may cause mildew.

Although the PVC cover material itself is waterproof, there is a chance of water ingress from the zippers when the shower tent is stored. We recommend to check the inside of the shower tent's bag to ensure no water has made its way inside in the case of bad weather. If there is moisture or water, the shower tent needs to be allowed to dry out.

STRUCTURE

Companion® shower tents have been designed for general outdoor use under normal conditions. Always ensure all poles, ropes, pegs and straps are attached and the shower tent is secured at all times.



TO AVOID CHANCES OF PERSONAL INJURY AND OR PROPERTY DAMAGE, COMPANION® HIGHLY RECOMMENDS THE SHOWER TENTS SHOULD NOT BE ERECTED DURING WINDY CONDITIONS

DAMAGED CAUSED BY WIND AND OR ADVERSE WEATHER WILL NOT BE COVERED UNDER WARRANTY.

FITTING

Companion® recommends this shower tent to be installed with 2-3 people. It is also recommended to use an experienced aftermarket 4X4 accessories fitter to mount the shower tent to your rack. All mounting hardware on both the shower tent and roof rack should be checked regularly to ensure they are always mounted securely.



COMPANION® TAKES NO
RESPONSIBILITY FOR THE FITMENT OF
THE SHOWER TENT TO ANY VEHICLE OR
ROOF RACK.

PROLONGED TRAVELLING ON UNEVEN, ROUGH OR CORRUGATED TERRAIN WILL REQUIRE MORE FREQUENT INSPECTIONS.

The brackets have been carefully designed to fit most common roof rack configurations. However, the increasing amount of roof rack designs available in the market makes it difficult to supply a bracket to fit all racks. It is recommended to discuss specific mounting options and load capacities with a roof rack specialist. Ensure you attach the brackets at the same distance out from the car so the shower tent will mount straight. Failure to do so may result in the backboard bending which isn't covered under warranty. It is recommended to use a straight edge or measuring tape to check this before you finish tightening the bolts and nuts.

WATERPROOFING

The raw materials that have been used on this shower tent have been designed to withstand most weather events. The water repellent coating and sealed seams provide protection from bad weather. Water ingress still may occur as this shower tent has zippers and multiple layered seams. Wind-driven rain can also cause water ingress underneath the shower tent. If you find that water is coming through a zipper, a softened wax stick can be used to rub over that area.

Disclaimer: Any addition applied onto the vehicle's roof changes the loading and handling of the vehicle. **Companion®** disclaims all responsibility in the occurrence of accidents due to improper use, lack of maintenance and not ensuring the shower tent has been securely fitted. Kakadu™ shall not be liable for any damages whether they are special, indirect, incidental, accidental or consequential.

4 5

SAFETY WARNINGS



KEEP ALL FLAME AND HEAT SOURCES AWAY FROM THE FABRIC.

UNDER NO CIRCUMSTANCES SHOULD ANY NAKED FLAME SOURCES BE USED NEAR THE SHOWER TENT.

KEEP CAMP FIRES AWAY FROM THE SHOWER TENT.

KEEP A FIRE EXTINGUISHER OR WATER BUCKET NEARBY. WATCH FOR AIRBORNE BURNING EMBERS THAT MAY COME INTO CONTACT WITH THE SHOWER TENT.

KEEP EXITS CLEAR.

IT IS ESSENTIAL TO HAVE ALL ROPES, PEGS AND STRAPS ATTACHED AT ALL TIMES WHEN THE SHOWER TENT IS IN USE.

WATCH FOR GUY ROPES, PEGS AND STRAPS TO PREVENT INJURY AS THEY CAN BE A TRIP HAZARD.

ENSURE CHILDREN ARE SUPERVISED AROUND THE SHOWER TENT AT ALL TIMES.

DO NOT OPERATE ANY DEVICE WHICH BURNS FUEL INSIDE THE SHOWER TENT.

WARRANTY POLICY

- 1. This warranty will apply only if you have purchased from us or our authorized dealer, and will apply only to the original purchaser who acquires the product for his or her own use.
- WARRANTY PERIOD: we warrant that this product will be free from defects in materials and workmanship under normal use as described in the published product documentation for 36 months.
- 3. WARRANTY: You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if products fail to be of acceptable quality and the failure does not amount to a major failure.
- 4. To the extent permitted by any applicable local law:
 - a. Our obligations under this Limited Warranty are limited to the repair, replacement or refund of covered parts that prove defective under normal use during the Limited Warranty and does not extend to any claim for damages that you or any other person may have for any loss (including without limitation consequential damages or loss of profit, freight/shipping or travel costs), or damage howsoever caused whether or not such loss or damage arises as a result of any defect in the product or from the failure or omission on our part to comply with any obligation at law;
 - In replacing a defective product under the Limited Warranty, we may, at our discretion, substitute a model of equivalent nature where the exact model is unavailable;
 - c. This Limited Warranty does not apply to damage caused by failure and damage caused by improper use and abuse, fair wear and tear, accidents, misuse (including failure to follow instructions regarding care and maintenance of the product), neglect, disassembly, alterations or external causes such as, but not limited to, water damage, exposure to sharp objects, exposure to excessive force, anomalies in the electrical current supplied to the product (if applicable), and extreme thermal or environmental conditions;
 - d. We may elect, at our discretion and as an alternative to repairing or replacing a defective part, to refund the cost of the relevant product upon it being returned to us; and
 - e. This Limited Warranty does not extend to any products acquired for the purposes of re-supply, or for use in manufacturing, or repair processes.
- 5. This warranty may be claimed by: returning the product to its place of purchase, with a detailed proof-of-purchase clearly showing the date and detail of the purchase;
- 6. If you have any questions concerning this warranty policy, you may contact us in writing: Adventure Operations, 71 Charles Ulm Place, Eagle Farm, 4009, QLD, Australia, or by email: service@adventureoperations.com or visit our website: www.adventureoperations.com

TO THE EXTENT PERMITTED BY LAW, ADVENTURE TRADING AUSTRALIA PTY LTD, ITS SUBSIDIARIES AND ITS VENDORS DISCLAIM ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY SIMILAR STANDARD IMPOSED BY APPLICABLE LEGISLATION AND ADVENTURE TRADING AUSTRALIA PTY LTD AND ITS SUBSIDIARIES' RESPONSIBILITY TO REPAIR, REPLACE, OR OFFER A REFUND FOR DEFECTIVE PRODUCTS IS THE SOLE AND EXCLUSIVE REMEDY PROVIDED TO ITS CUSTOMERS UNDER THIS DOCUMENT.

NOTE:	NOTE:

8

WARRANTY - For details see www.companionoutdoor.com

Companion® is a registered trademark of **Adventure Trading Australia Pty Ltd**

Designed by: **Adventure Trading Australia Pty Ltd** 71 Charles Ulm Place, Eagle Farm, QLD 4009 AUSTRALIA

Made in China